



SPECIFICATIONS

Dual control for water treatment system (not included)

Cromo polished

180° swivel spout (adaptable 120 ° or 360 °)

Anti limescale aerator M 22 x 1, filtered water aerator


ø 3/8" stainless steel flexible pipe

SALTORIGA


Note: only compatible with mechanical under washbasin systems without solenoid valve

50% two step cartridge for water saving

Packaging: 66 x 34,5 x 7 cm / 0,01594 m³ / 2,63 kg

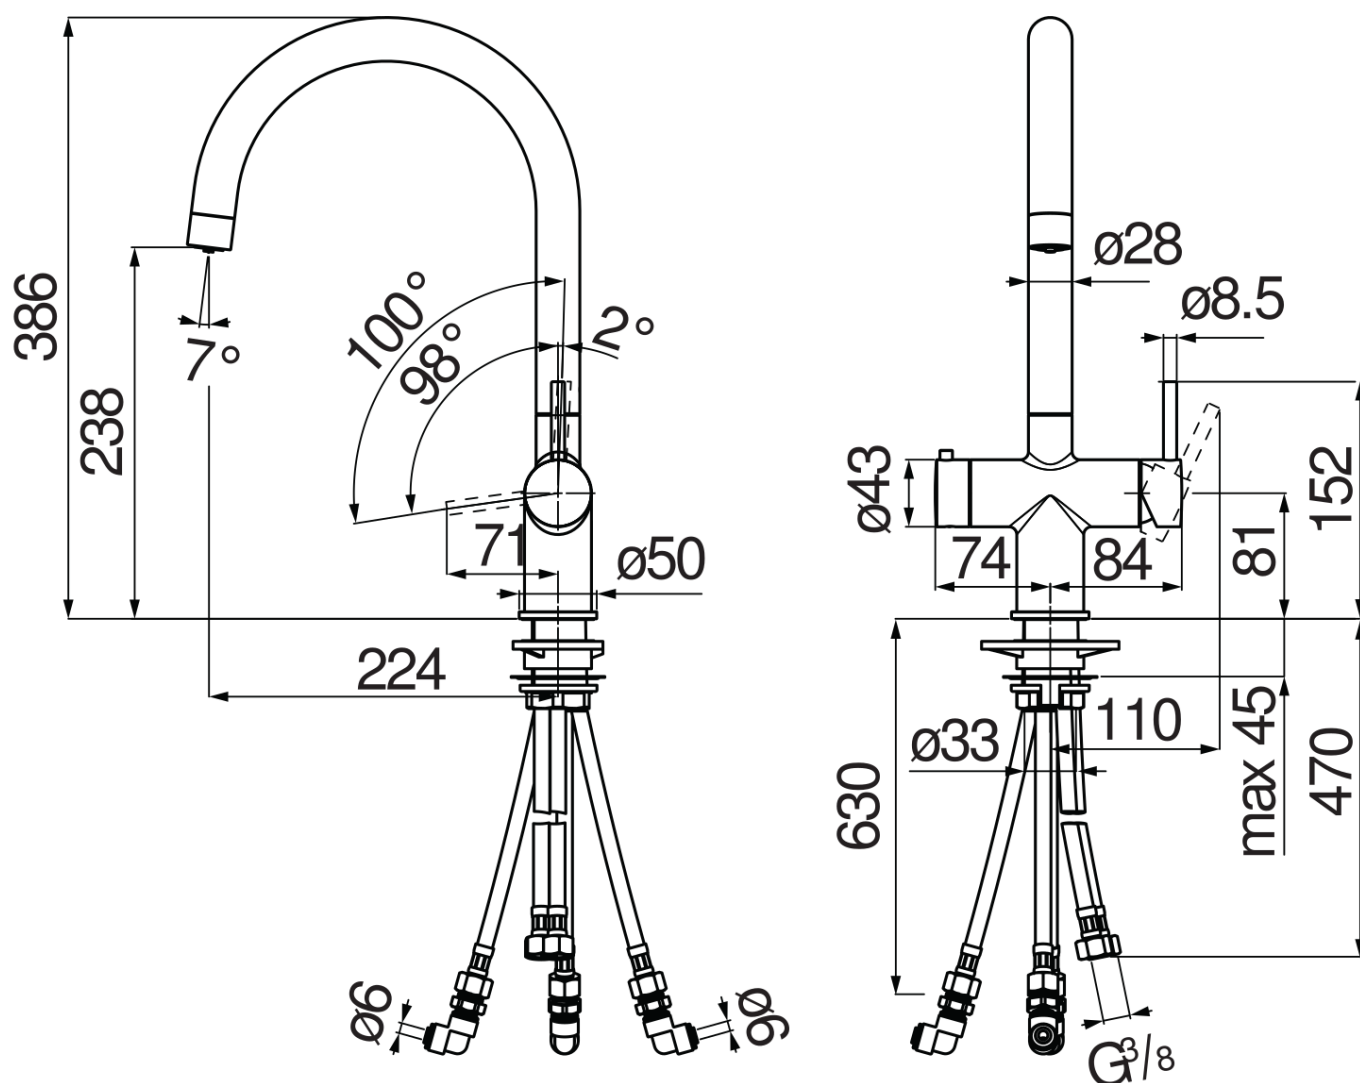

FLOW RATE DIAGRAM: HOT/COLD WATER

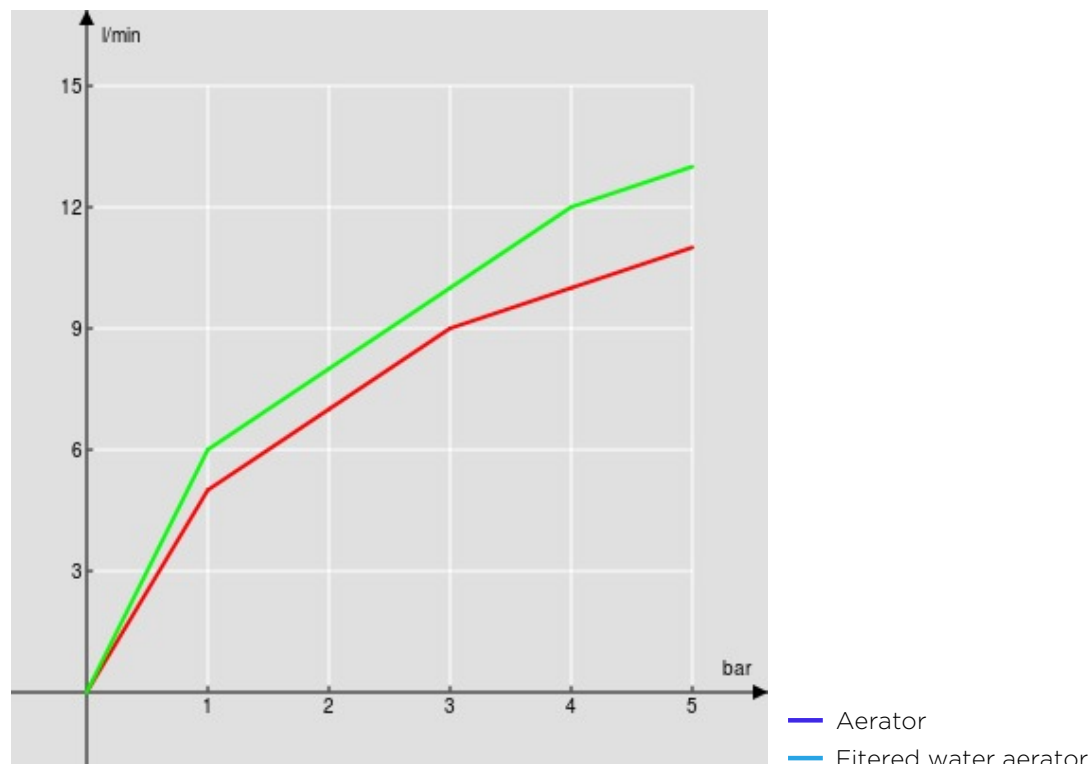

FLOW RATE DIAGRAM: MIXED WATER

