



SPECIFICATIONS

Electronic dual-lever with All-in-One system

Ambra brushed PVD

180° swivel spout (adaptable 120 ° or 360 °)

Anti limescale aerator M 22 x 1

Ø 3/8" stainless steel flexible pipe

Colour LEDs to select the type of water to dispense (room temperature filtered water, chilled water, carbonated chilled water, instant boiling filtered water)

Separate dispensing channels for filtered water, carbonated filtered water and boiling filtered water

EC certified electronic All-in-One device

Chilled water temperature can be selected between 4°C and 10°C using the Nobili Sorgente app

Customisable degree of carbonation

Dispenses instant boiling water at 99 °C (up to 2.6 litres > 99 °C)

Dispenses up to 1.7 litres below 10°C

Chills by 10 °C up to 2.2 litres of water in 8 minutes (approximately)

GIOIA 5-stage filter with RFID* technology (maximum duration 1 year)

CO2 cylinder included in the set (compatible with all cylinders with standard 29" thread)

WiFi connectivity with the Nobili Sorgente App on Android and Apple

Maximum power rating 1800 W

Voltage 230 V (50 Hz)

Full hot/cold water supply

SALTORIGA

carlo nobili spa rubinetterie - via novara 29, suno (no) italia - office +39 0322 885885 - mail info@nobili.it - web nobili.it

*Single compatible filter available for purchase from Nobili or distributor


SALTORIGA

N.B.: variant with UK plug available with another product code


SALTORIGA

N.B.: minimum installation requirements L 30 x D 55 x H 49 cm (subject to connection)

SALTORIGA

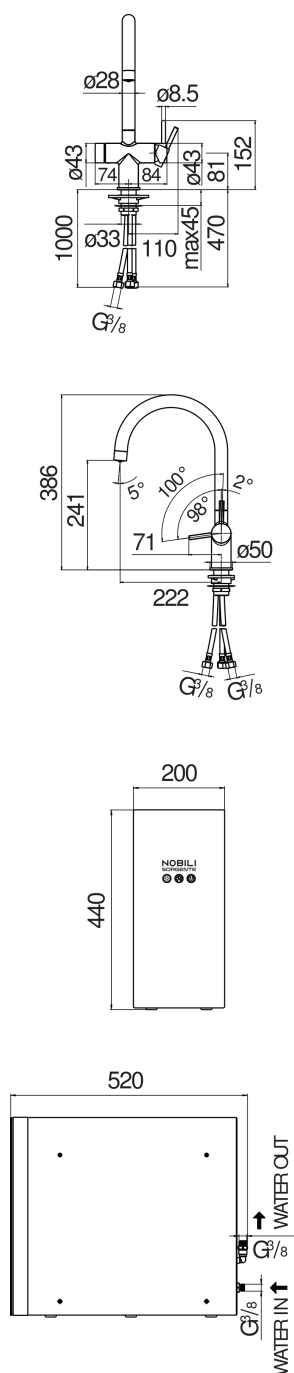

FLOW RATE DIAGRAM: HOT/COLD WATER

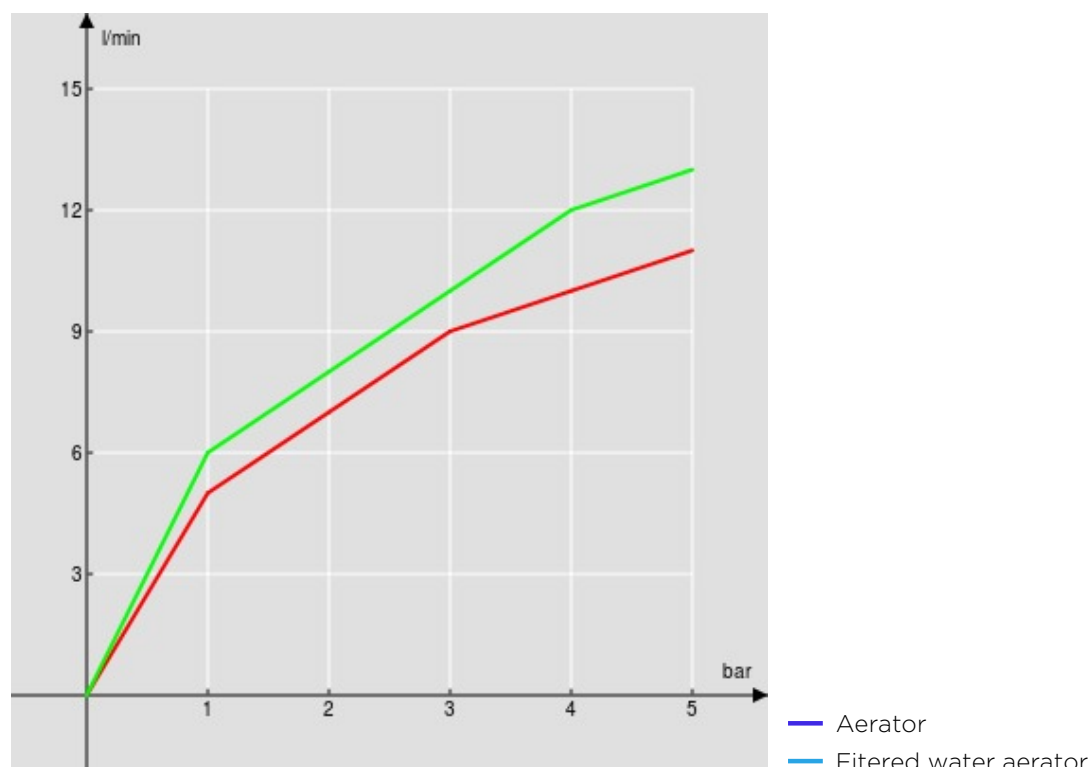

FLOW RATE DIAGRAM: MIXED WATER

