



SPECIFICATIONS

Electronic dual-lever with chilling-carbonating system

Ambra brushed PVD

180° swivel spout (adaptable 120 ° or 360 °)

Dual Flow aerator M 22 x 1

ø 3/8" stainless steel flexible pipe

Colour LEDs to select the type of water to dispense (room temperature filtered water, chilled water, carbonated chilled water)

Separate dispensing channels for filtered water and carbonated filtered water

EC certified electronic chilling-carbonating device

Chilled water temperature can be selected between 4°C and 10°C using the Nobili Sorgente app

Customisable degree of carbonation

Dispenses up to 1.7 litres below 10°C

Chills by 10 °C up to 2.2 litres of water in 8 minutes (approximately)

GIOIA 5-stage filter with RFID* technology (maximum duration 1 year)

CO2 cylinder included in the set (compatible with all cylinders with 270 V)

WiFi connectivity with the Nobili Sorgente App on Android and Apple

Maximum power rating 230 W

Voltage 230 V / 50 Hz

EU Schuko power supply

SALTORIGA

*Single compatible filter available for purchase from Nobili or distributor

carlo nobili spa rubinetterie - via novara 29, suno (no) italia - office +39 0322 885885 - mail info@nobili.it - web nobili.it


N.B.: minimum installation requirements L 30 x D 55 x H 49 cm (subject to change)

SALTORIGA


The Apple and Apple Store trademarks are the sole property of Apple Inc.

50% two step cartridge for water saving

Packaging: 66 x 34.5 x 7 cm / 0.01594 m³ / 2.63 kg

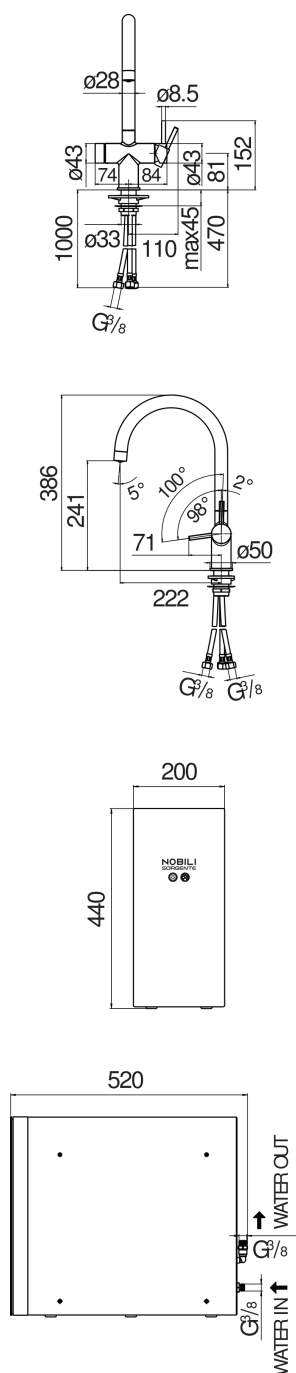

FLOW RATE DIAGRAM: HOT/COLD WATER

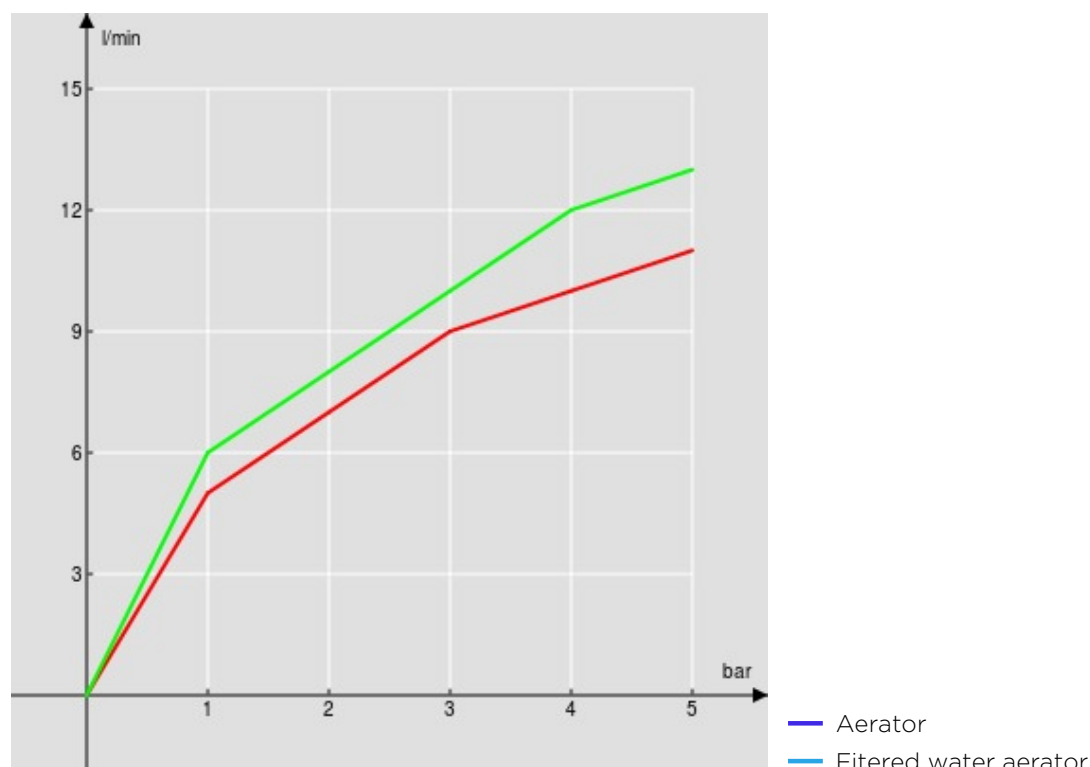

FLOW RATE DIAGRAM: MIXED WATER

