



0709413

3V100 – DUAL FLUSH MECHANISM WITH CABLE

FUNCTION

- Dual flush mechanism for exposed WC cisterns
- Suitable for covers with a 40 mm hole diameter
- Compatible with ceramics and plastic cisterns

DESCRIPTION

- Finish : chrome push button
- Cable in stainless steel, protected in a sleeve.
- Bayonet system

TECHNICAL CHARACTERISTICS

- Covering height : 300 to 420 mm
- Diameter of base : G2"
- Adjustable remaining water level
- Valve seal in Silicon (removable for cleaning)
- Soft-closing

NF CERTIFIED



ACCESSORIES

- Cistern-on-pan gasket supplied
- Cistern-on-pan fixing kit supplied (in stainless steel)

IMPLEMENTATION


- Tightening key supplied for the 2" white nut
- Overflow adjustable to the height of the cistern (by cutting the rings if necessary)
- Adjustment of the large flush volume : set the height of the blue slider
- Adjustment of the small flush volume : set the height of the blue float by pinching on both sides simultaneously
- Clic the button into the cable box : ready to operate...

MAINTENANCE

- Easy interchangeable bayonet base and lock release button
- Servicing : regularly pour a glass of white vinegar to avoid scale deposits

PACKAGING

- Nicoll PE Bag

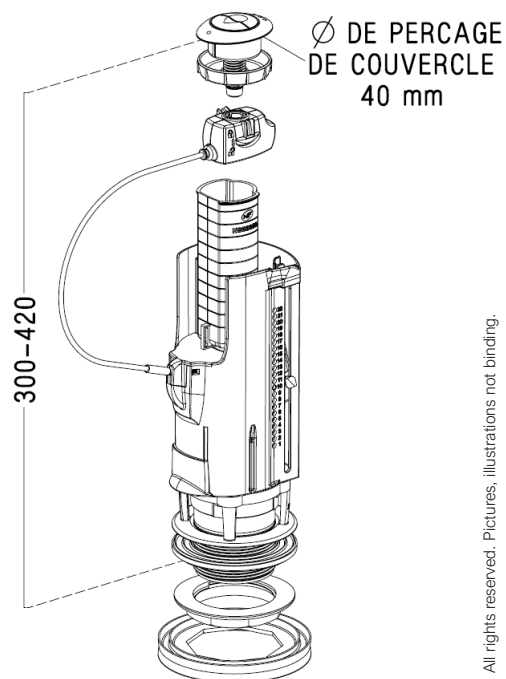

DECEMBRE 2017



Nicoll

Head office and Plants: 37, rue Pierre & Marie Curie
BP 10966 - 49309 Cholet Cedex
Phone + 33 (0)2 41 63 73 83
Fax +33(0)2 41 63 73 57
Email: export.nicoll@aliaxis.com

an *Aliaxis* company