

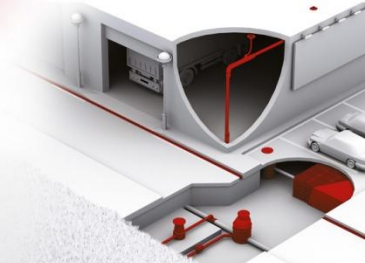


Kenadrain | Channel 100mm wide with galvanized steel slotted grating class A15 – Height 1

Code : DR101AP



EN1433
CE

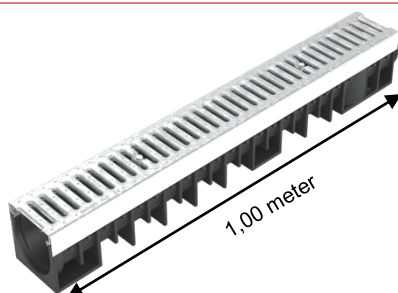

Bottom view



FUNCTION :

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the CE marking, it can be used in private area for all building applications, the environment of home, parks and gardens in class A15.

DESCRIPTION :

It consists of:

- an injected recycled polypropylene black body
- two galvanized steel edges
- one galvanized steel slotted grating class A15
- 2 screws per grating on galvanized locking bar

ACCESSORIES :

To connect the channels to the underground network :

- end cap/end outlet Ø50 – NPDR100
- vertical outlet Ø100, 110 or 125 – STDR10, SVDR10 or SXDR10
- sump unit with outlet Ø110 or 125 – PS100V or PS100X



STDR10
SVDR10
SXDR10





NPDR101



PS100V
PS100X

TECHNICAL DATA :

Resistance class: A15
Effective width: 98 mm
Effective depth: 92 mm
Grating type: Galvanized steel slotted
Drainage surface: 260 cm²/ml
Hydraulic section: 83 cm²
Opening dimensions: 10 / 80 mm
Weight: 7.0 Kg

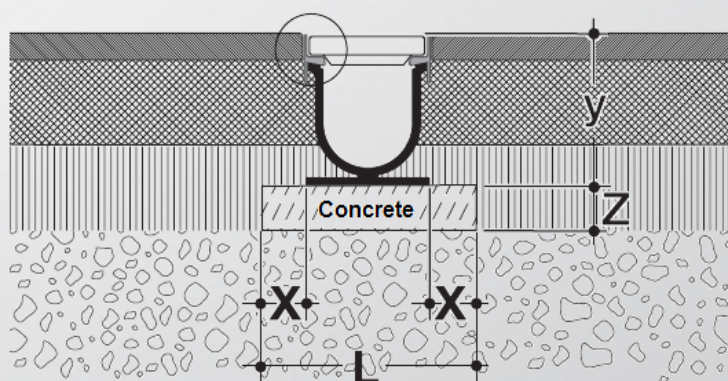

IMPLEMENTATION :

X = 50 mm; L = 230 mm
Z = 50 mm; y = 135 mm

QUALITY - ENVIRONMENT :

ISO 9001
ISO 14001
BUREAU VERITAS
Certification



DATE : August 2014