VELIS
VE125030SB

NOBILI

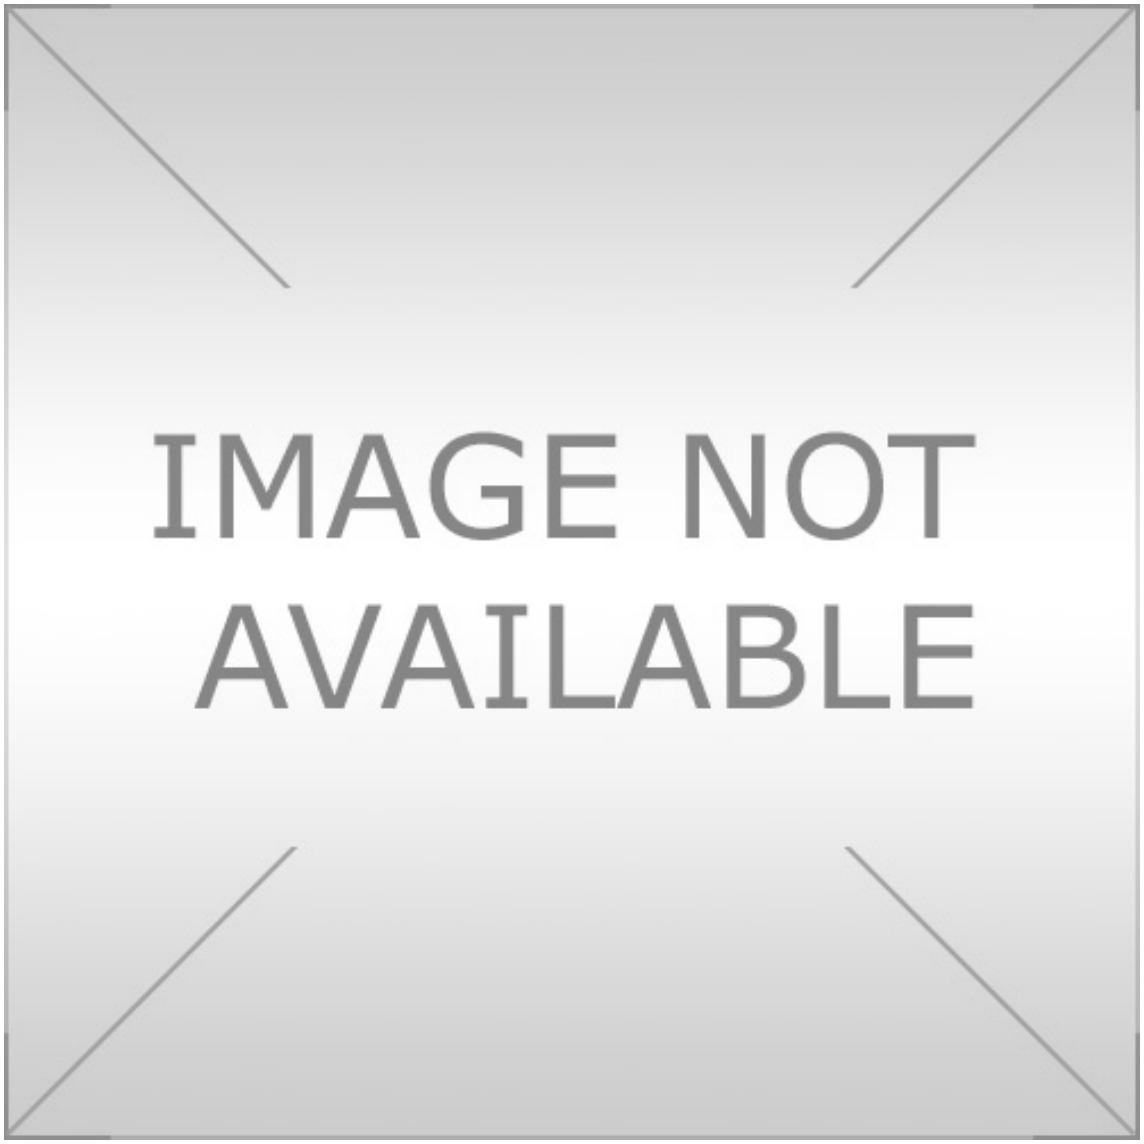

SPECIFICATIONS

External thermostatic mixer
Caffè brushed
38° C safety cut-out, non-return valves
ø 1/2" outlet
Packaging: 24 x 25 x 8 cm / 0,0048 m^3 / 2,65 kg

CERTIFICATIONS

carlo nobili spa rubinetterie - via novara 29, suno (no) italia - office +39 0322 885885 - mail info@nobili.it - web nobili.it

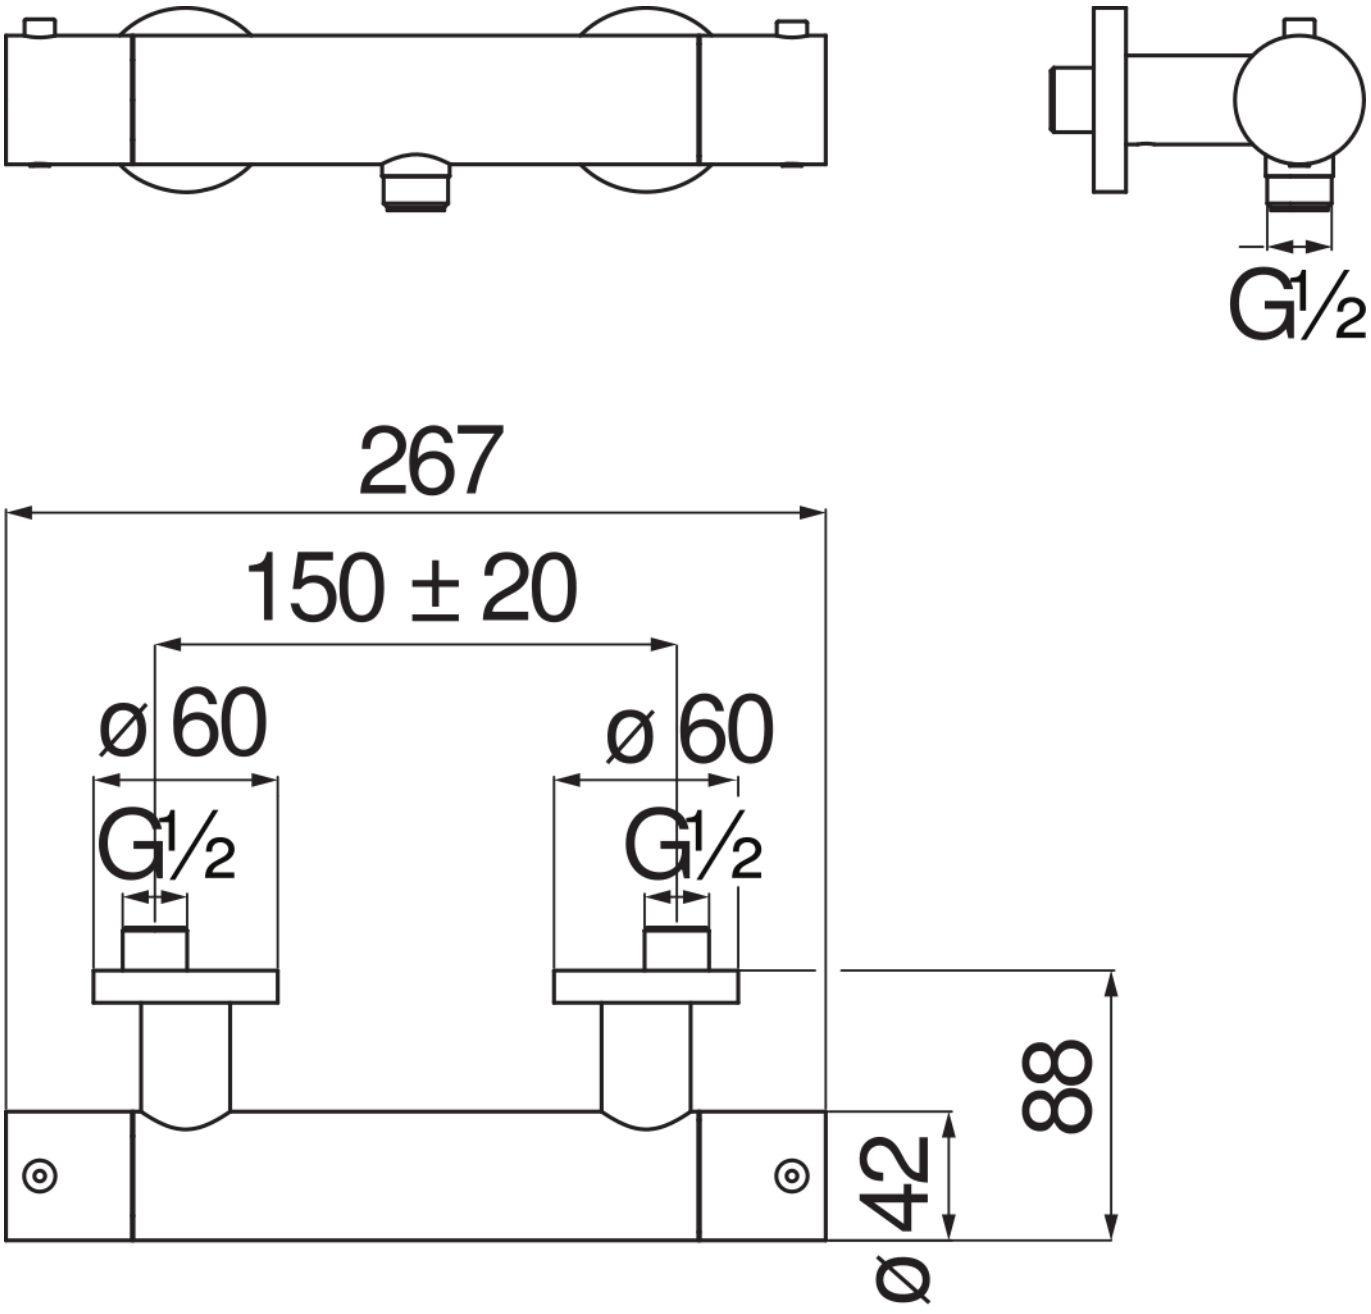
G1/2
267
150 ± 20
ø 60
ø 60
G1/2
G1/2
88
42
ø

FLOW RATE DIAGRAM: HOT/COLD WATER

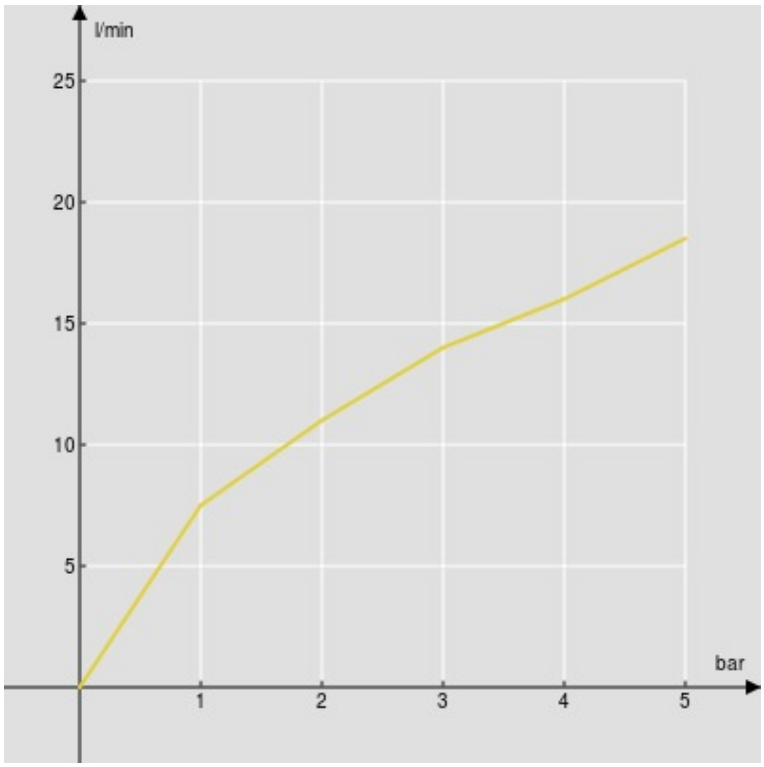

1st Way

FLOW RATE DIAGRAM: MIXED WATER

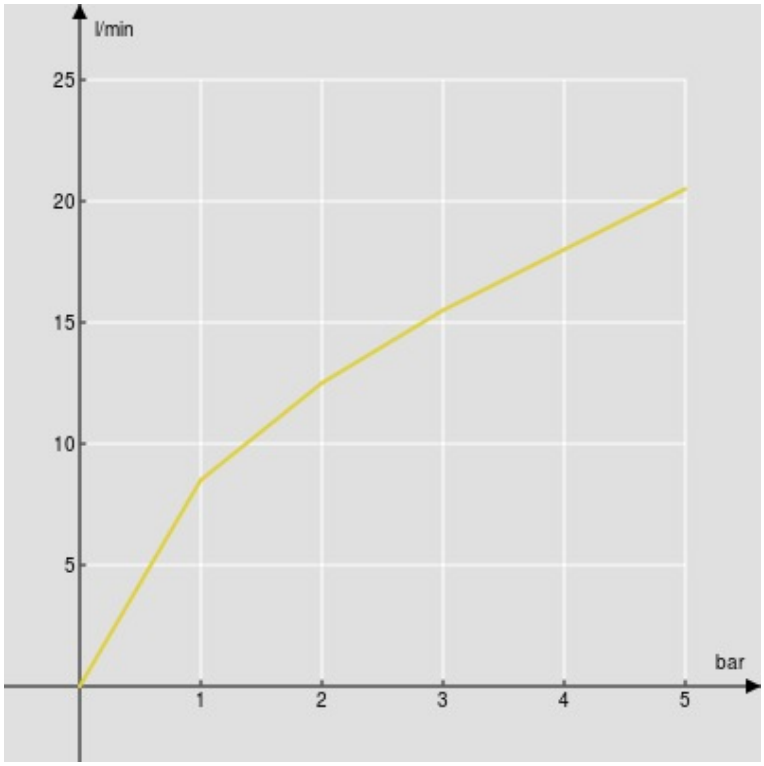

1st Way