UP
UP94010/1CR

NOBILI

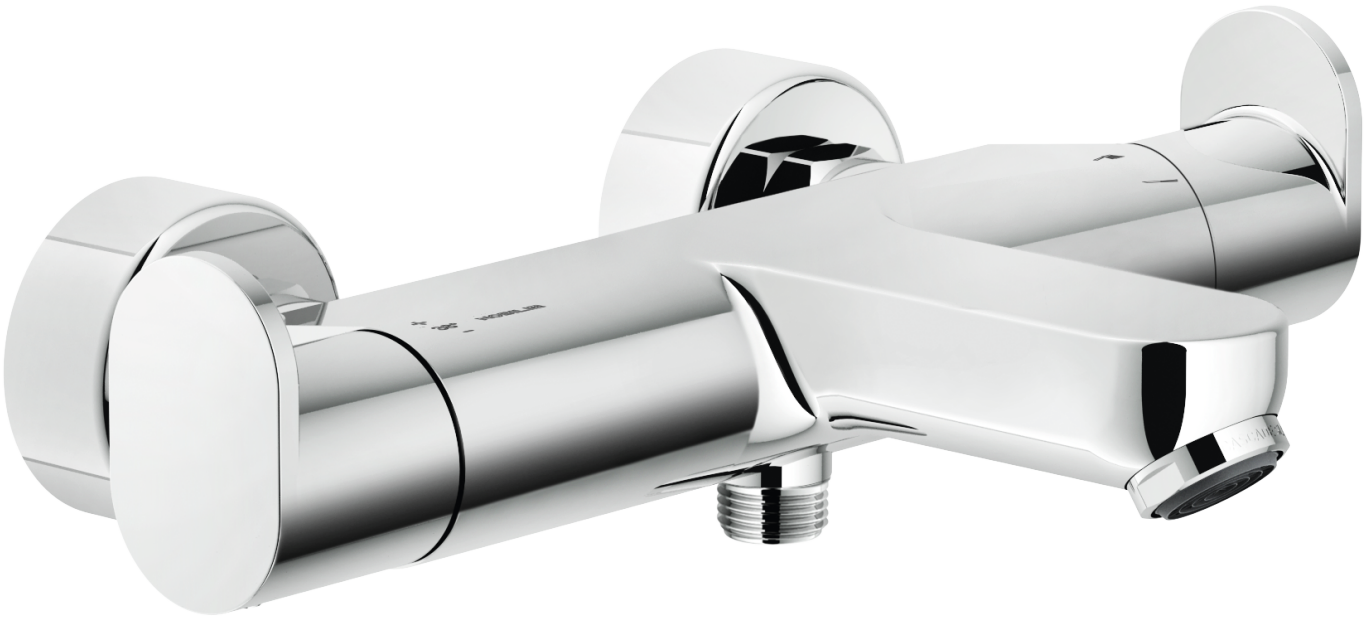

SPECIFICATIONS

External thermostatic mixer
Cromo polished
38° C safety cut-out
Non-return valves
Anti limescale aerator M 28 x 1
2 ways ceramic diverter
ø 1/2" outlet
Packaging: 41 x 21 x 7 cm / 0,006027 m^3 / 2,932 kg

CERTIFICATIONS

BELGAQUA

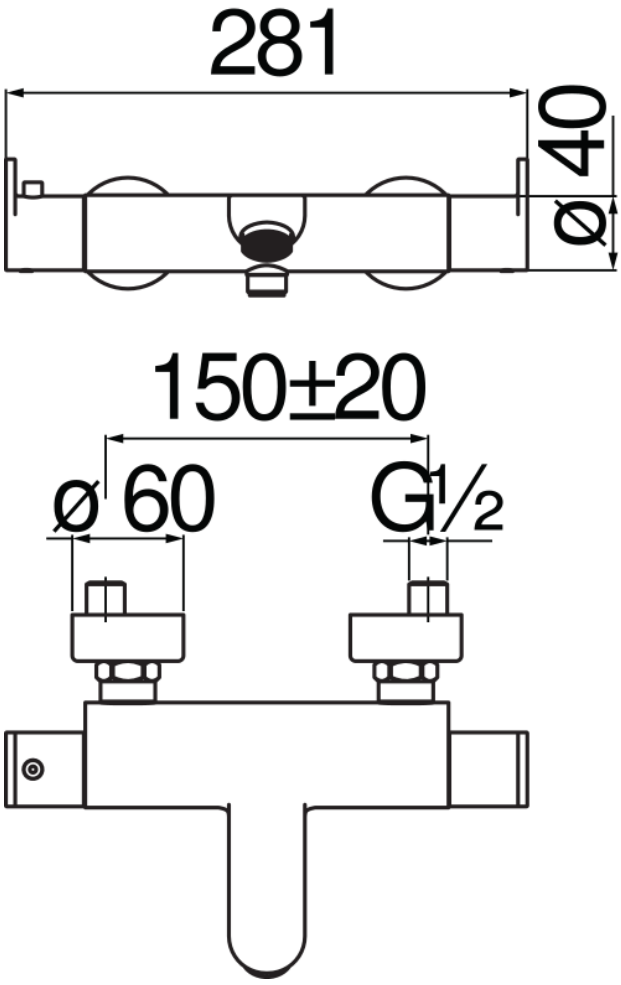
281
ø 40
150±20
ø 60
G1/2

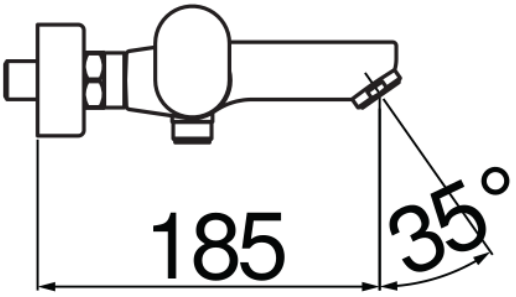
185
35°

FLOW RATE DIAGRAM: HOT/COLD WATER

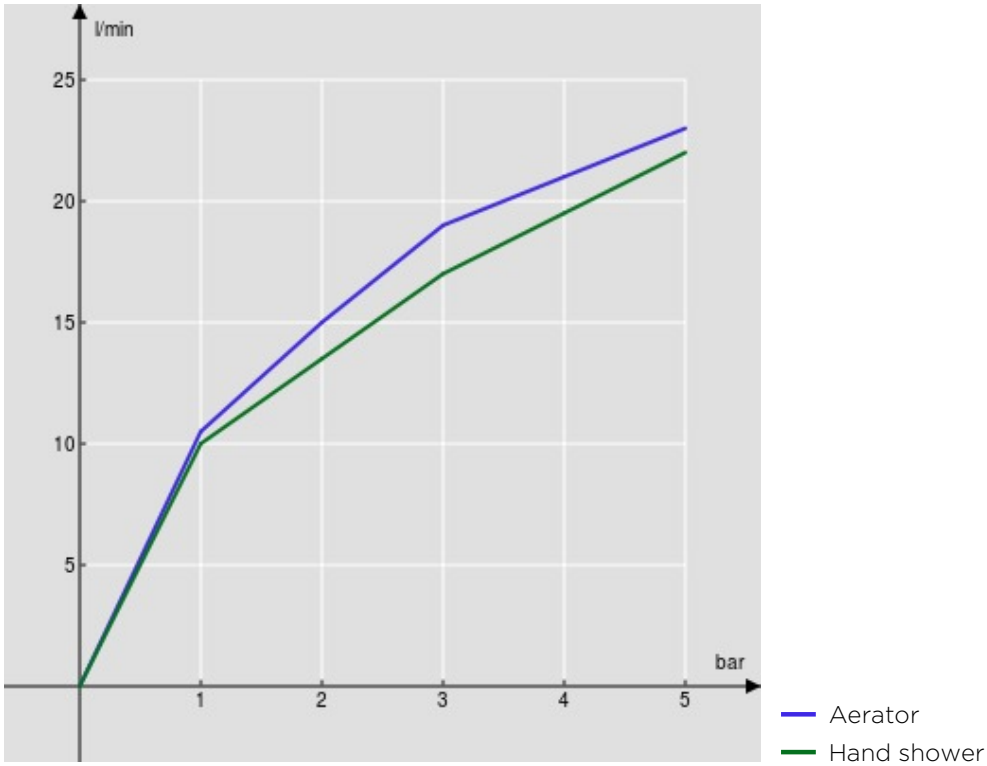
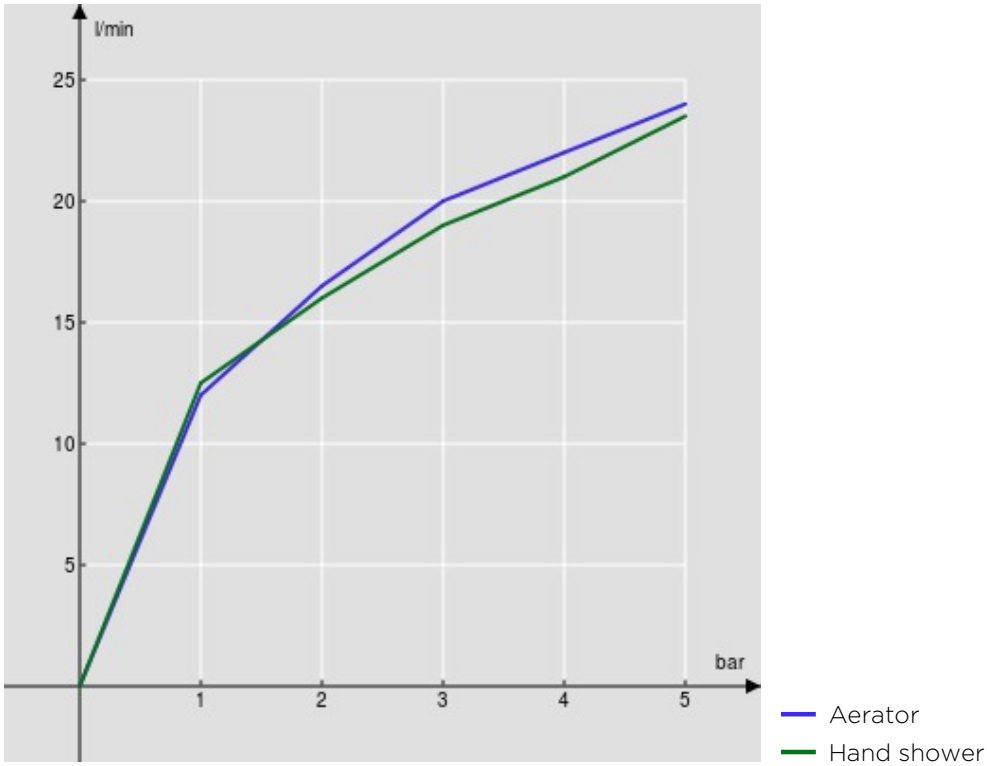
FLOW RATE DIAGRAM: MIXED WATER