UP

UP94130CR

NOBILI

SPECIFICATIONS

External single control
Cromo polished
ø 1/2" outlet
50% two step cartridge for water saving
Packaging: 21 x 17 x 7 cm / 0,0025 m^3 / 1,65 kg

CERTIFICATIONS

BELGAQUA

carlo nobili spa rubinetterie - via novara 29, suno (no) italia - office +39 0322 885885 - mail info@nobili.it - web nobili.it

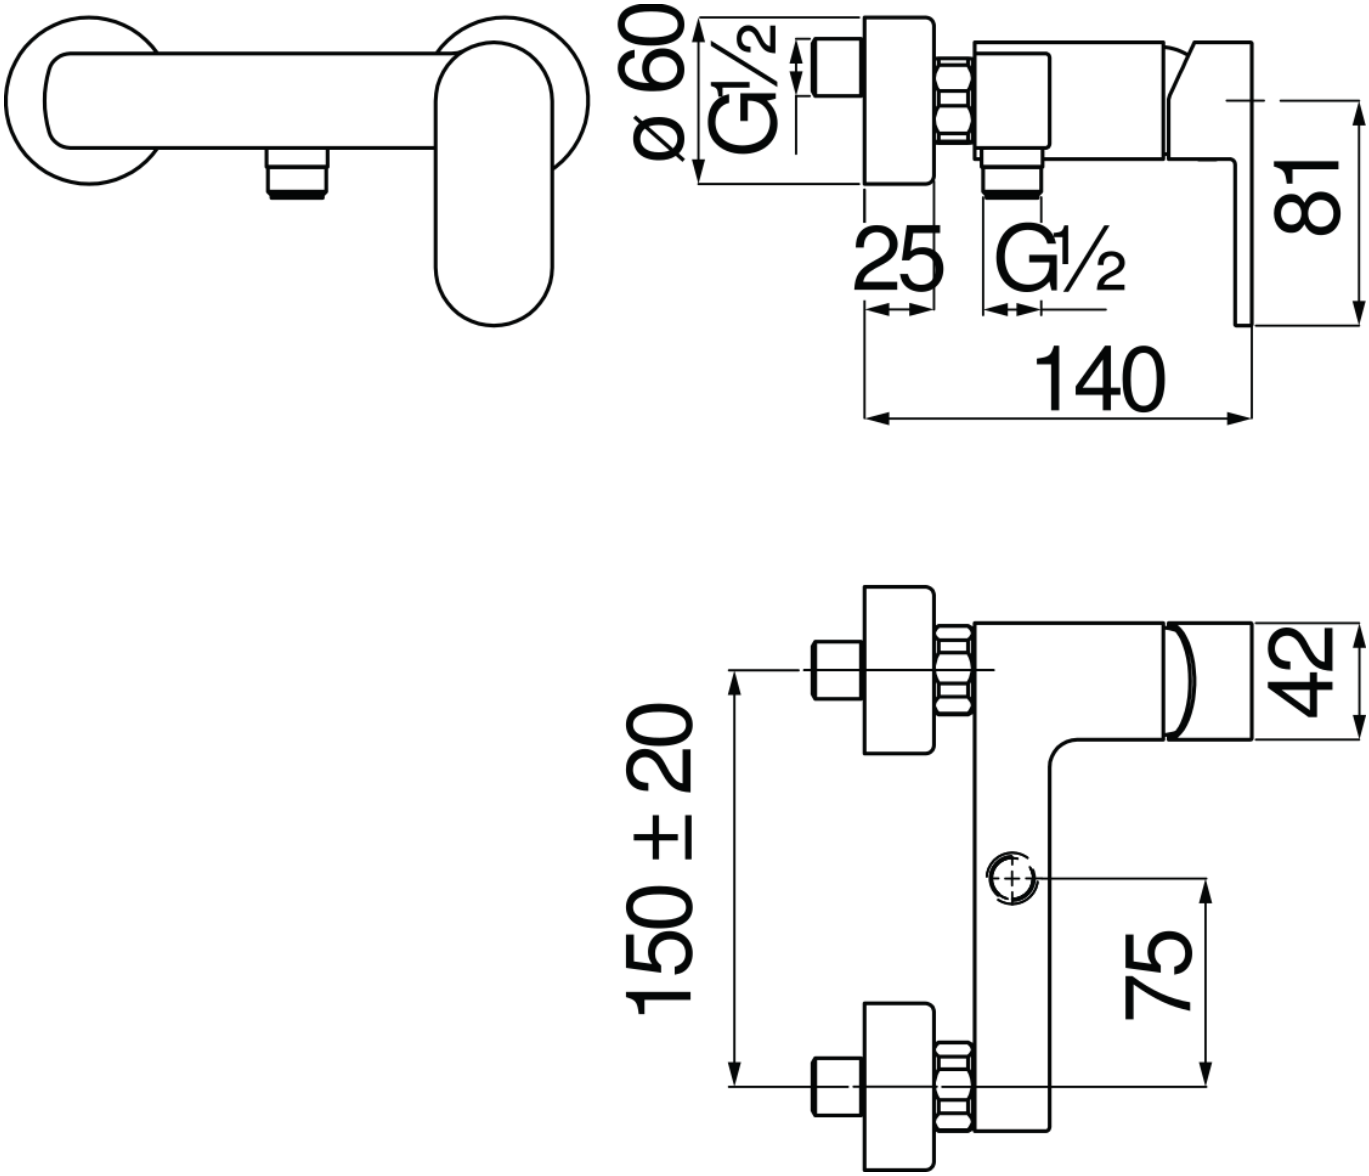
ø 60
G½
25
G½
81
140
150 ± 20
42
75

FLOW RATE DIAGRAM: HOT/COLD WATER

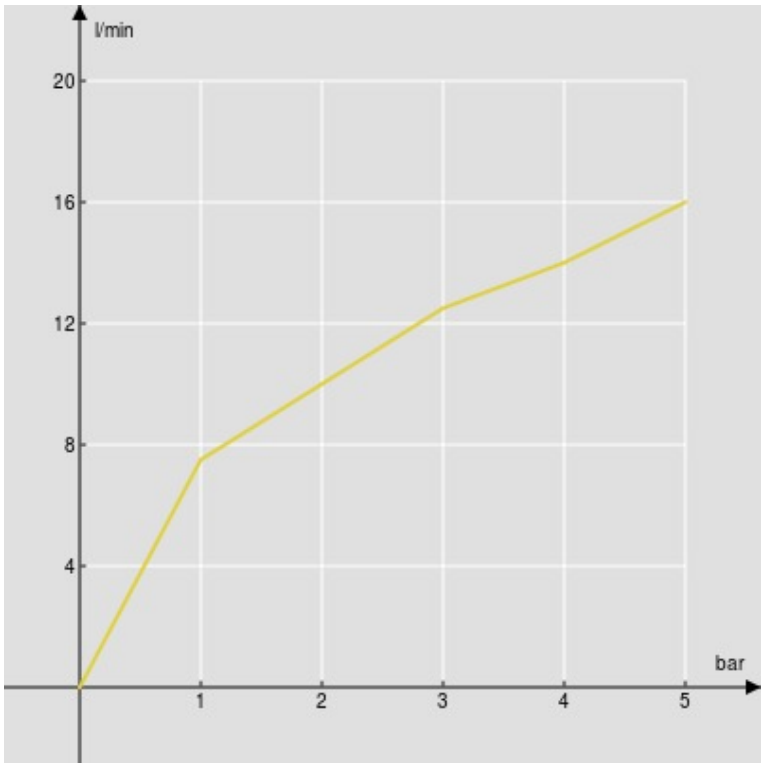

1st Way

FLOW RATE DIAGRAM: MIXED WATER

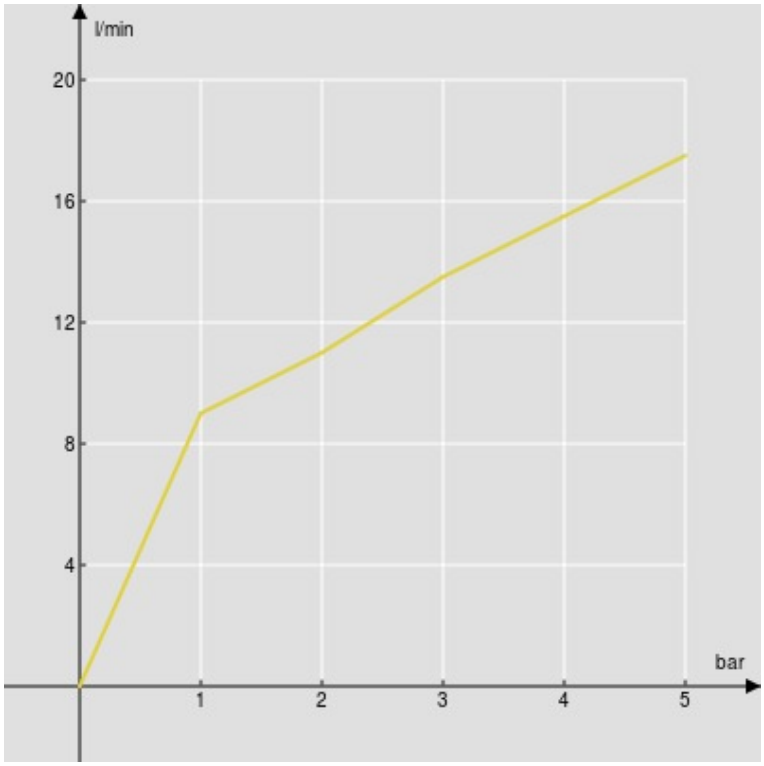

1st Way